

MAGRON Anode-1 Ink

Anode Inks

Due to the inherent properties of the MAGRON Anode ink, there is no need for any specific or expensive post treatment process to activate their properties. It can therefore be processed on aluminium substrate by various techniques:

MAGRON have specific inks to produce printed lithium ion batteries, such as the anode, the cathode and the electrodes. These inks can be used as:

MAGRON anode ink is easily solubilized in various solvents, showing unique properties such as:

- Low cost solution
- Low material and processing cost
- Tight quality control to ensure reproducibility
- Custom formulation for each printing need.

For a 13-100 μm thickness film by doctor blade:



- Doctor blade printing
- Screen printing

- Printed batteries
- Energy harvesting
- Green electrodes for batteries



Instructions:

Place it in a mechanical stirring between 30-60 minutes. The ink is ready to be used. After the printing process, the ink should be cured at 80 °C during 60 minutes.

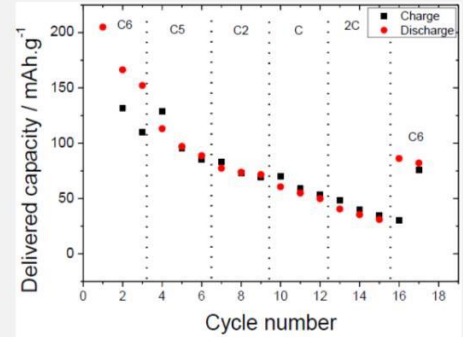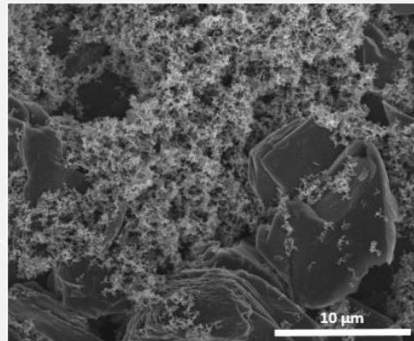

Properties

	Unit	Internal tests
Physical form		Solution
Thermal cure temperature	°C	80
Cure time	minutes	60
Viscosity	Pa.s	<15
Max. particle diameter	μm	< 20
Expiration date after opening	Months	4
Screen Printing properties		
Mesh opening	μm	102
Mesh count, warp	n/cm	65
Wire diameter, warp	μm	52
Tension on mesh	N	17-20